




*J D Jones & Co (P) Ltd*

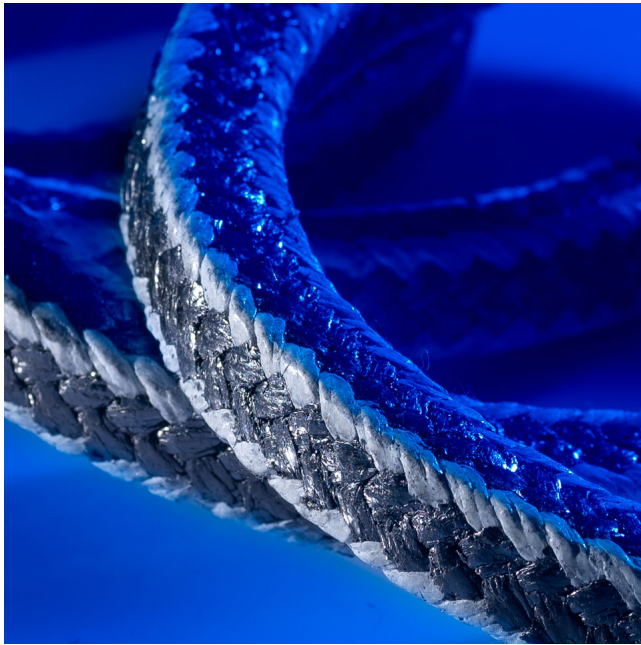

## Pacmaan<sup>®</sup> NA 20747

Special high performance packing of expanded graphite braid with meta-aramid corners, PTFE lubricant impregnated

- Ideal packing for services ensuring strength and resistance to corner extrusion
- Excellent abrasion resistance with high thermal conductivity

*Very gentle on shaft surfaces without hardening*

<b>Service Media and Conditions</b>	Petrochemical industry, chemical industry, power plant etc
<b>Temperature</b>	-100°C to 260°C
<b>Pressure</b>	80 bar (static), 60 bar (rotary)
<b>Shaft Speed</b>	40 m/sec (rotary)
<b>pH</b>	1 to 13
<b>Applications</b>	Centrifugal pumps, compressors, blowers, fans etc