




J D Jones & Co (P) Ltd

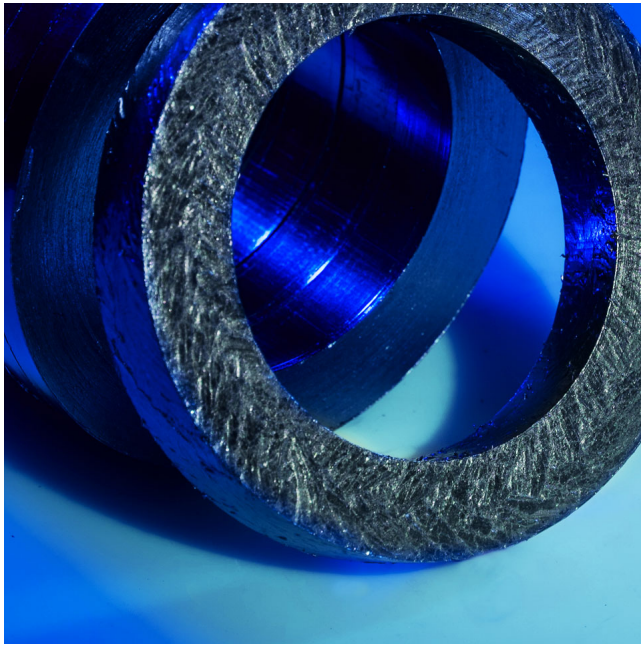

Pacmaan[®] NA 701 + 707

Special combination packing set of braided and die moulded flexible graphite rings

- Top and bottom anti-extrusion rings of braided flexible graphite with Inconel wire (single oblique cut)
- Intermediate rings of die moulded graphite (endless/2 halves)
- Ideal for frequently operated control valves handling superheated and saturated steam, hydrocarbons and chemicals valves
- The set has superb resilience

Ready to use ring sets

Service Media and Conditions	Superheated and saturated steam, all non-oxidising liquids and gases, hydrocarbons, dyes and chemicals, fuel oil and lube oil etc
Temperature	-200°C to 540°C
Pressure	350 bar (static)
pH	0 to 14
Applications	Valves