




*J D Jones & Co (P) Ltd*

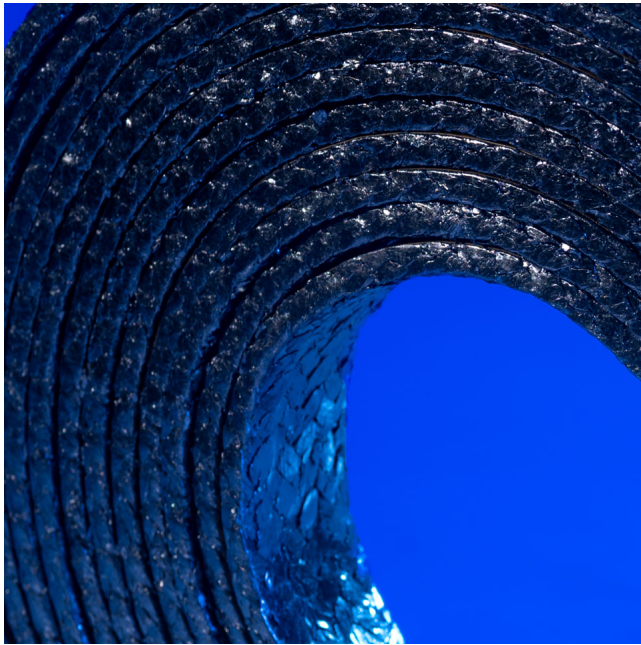

## Pacmaan<sup>®</sup> NA 701T

Expanded graphite braided gland packing reinforced with Inconel wire, calendared in the form of tape

- Versatile gasket material for wide range of application
- Ideal for superheated and saturated steam, hydrocarbons and chemicals
- Incorporated with a sacrificial metal corrosion inhibitor to protect from galvanic corrosion
- Can be used throughout plant because of easiness on installation, can be made to any dimension and shape and high thermal and chemical resistance

*Available with and without self-adhesive backing*

|                                     |   |
|-------------------------------------|---|
| <b>Service Media and Conditions</b> | Superheated and saturated steam, all non-oxidising liquids and gases, hydrocarbons, dyes and chemicals, fuel oil and lube oil etc |
| <b>Temperature</b>                  | -240°C to 650°C   |
| <b>Pressure</b>                     | 450 bar (static)  |
| <b>Shaft Speed</b>                  | 1 m/sec (rotary)  |
| <b>pH</b>                           | 0 to 14   |
| <b>Applications</b>                 | Metallic and non-metallic flanges, lids, covers, reactors, autoclaves, heaters etc  |