




*J D Jones & Co (P) Ltd*

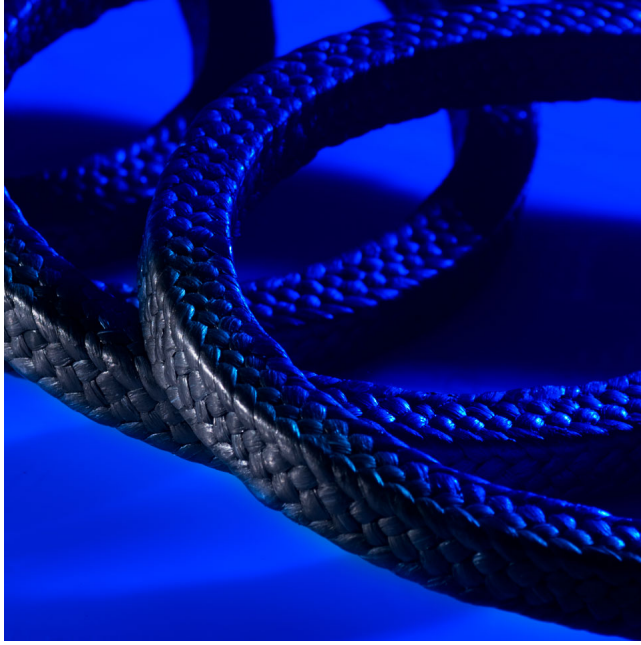

## Pacmaan<sup>®</sup> NA 757

Graphited PTFE yarn packing in interlock braiding

- A general purpose packing made from high grade graphited and lubricated PTFE yarns
- Can be used for a wide range of services across the plant
- Dense pliable packing with a high degree of resiliency
- Does not cause shaft wear

*Available in rope and ring form*

<b>Service Media and Conditions</b>	Bleach washer, caustics, non-abrasive liquor, DM water, condensate, acids, hypo, boiler feed water, fuel-lube oil, acid and alkali regeneration
<b>Temperature</b>	-200°C to 280°C
<b>Pressure</b>	250 bar (static), 28 bar (rotary), 100 bar (reciprocating)
<b>Shaft Speed</b>	24 m/sec (rotary), 2 m/sec (reciprocating)
<b>pH</b>	0 to 14
<b>Applications</b>	Pumps, agitators, mixers, valves, washers