




*J D Jones & Co (P) Ltd*

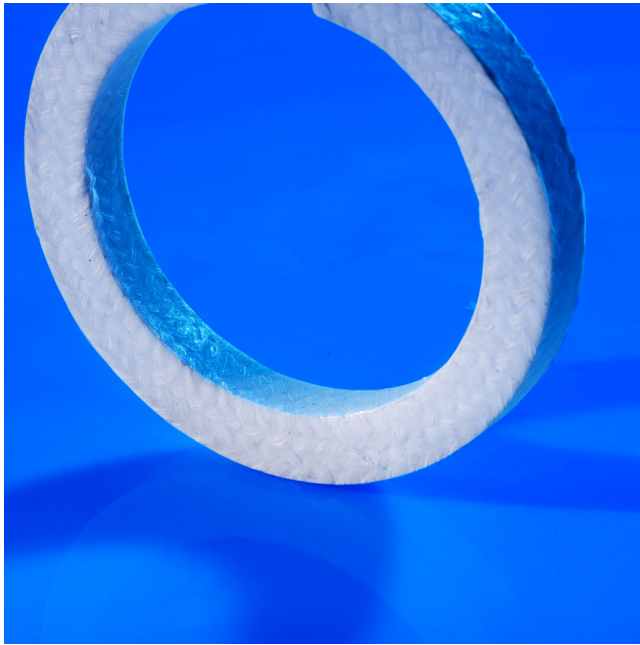

## Pacmaan<sup>®</sup> NA 768

Ramie fibre interlock braided packing impregnated with PTFE and break-in lubricant

- Superior alternative to both conventional asbestos greased graphited packing and cotton packing
- Tough vegetable fibres are gentle on the shaft and prevent scoring
- Extends pump bearing life
- PTFE lubrication reduces friction

*Excellent resistance to rot and wear*

<b>Service Media and Conditions</b>	Water, chilled water, cooling water, raw water etc
<b>Temperature</b>	-50°C to 150°C
<b>Pressure</b>	50 bar (static), 25 bar (rotary), 30 bar (reciprocating)
<b>Shaft Speed</b>	10 m/sec (rotary)
<b>pH</b>	5 to 11
<b>Applications</b>	Pumps and valves