




J D Jones & Co (P) Ltd

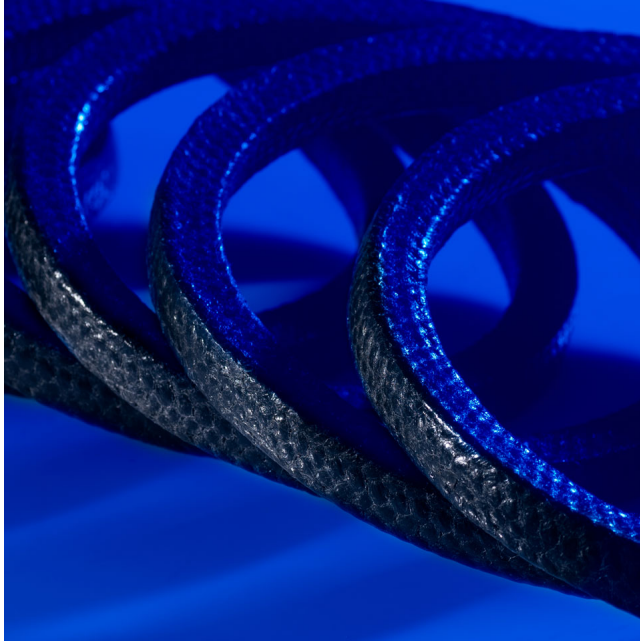

Pacmaan[®] NA 770

Ramie fibre interlock braided packing impregnated with PTFE, graphite and break in lubricant

- Superior alternative to conventional asbestos greased graphite packing as well as cotton packing
- PTFE lubrication reduces friction
- Tough vegetable fibres are gentle on the shaft, prevent scoring
- Extends pump bearing life
- PTFE lubrication reduces friction
- Presence of graphite improves heat dissipation

A softer packing for low pressure hydraulic applications

Service Media and Conditions	Cold water, salt water, waste water, cold oil.
Temperature	150°C
Pressure	100 bar (static), 40 bar (rotary)
Shaft Speed	6 m/sec (rotary)
pH	5 to 11
Applications	Pumps and valves