




J D Jones & Co (P) Ltd

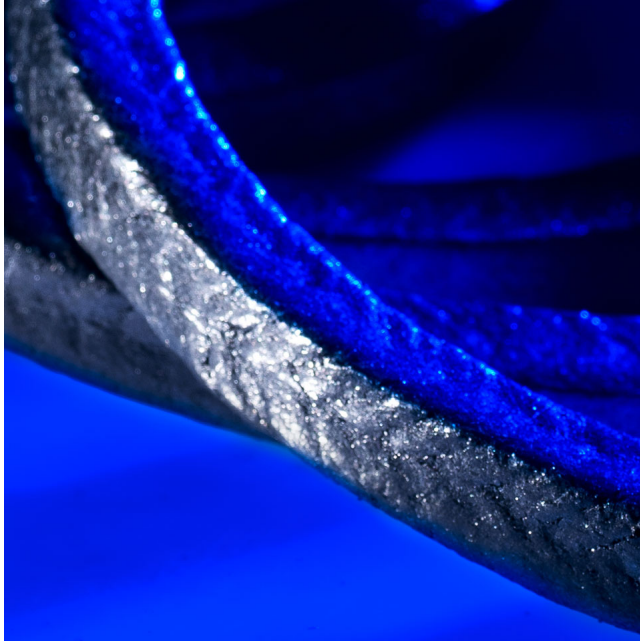

Pacmaan[®] NA B-3

Expanded graphite packing with Inconel wire mesh jacketing over each yarn

- The most advanced technology valve packing, designed for extreme performance
- Ideal for valves handling superheated and saturated steam, hydrocarbons and chemicals valves
- Packing exhibits extreme pressure and extrusion resistance, serves as an excellent wiper ring in a valve packing set
- The packing exterior is densely impregnated with lubricating agents to reduce stem friction and a corrosion inhibitor to prevent pitting
- High purity of graphite: 99.5–99.9%
- Nuclear grade upon request

Available in rope and ring forms

Service Media and Conditions	Superheated and saturated steam, all non-oxidising liquids and gases, hot ash, hydrocarbons, dyes and chemicals, fuel oil and lube oil etc
Temperature	-240°C to 650°C
Pressure	500 bar (static)
pH	0 to 14
Applications	Valves