




*J D Jones & Co (P) Ltd*

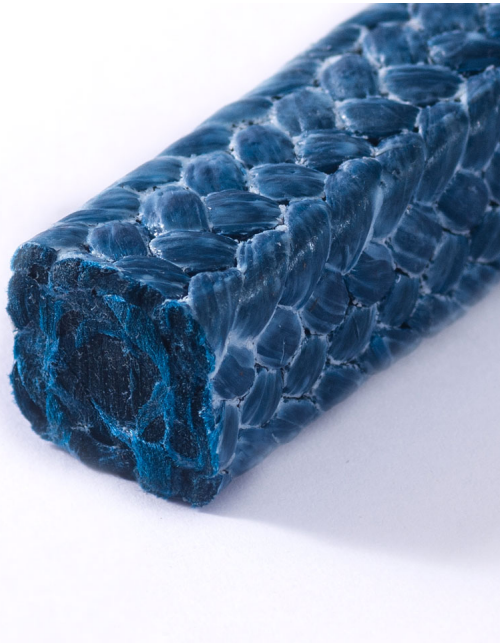

## Pacmaan<sup>®</sup> NA P84

Special blue polyamide yarn braided packing impregnated with PTFE and high viscous lubricant in interlock braid

- A new generation packing made from filament composed of synthetic polyamide
- Excellent mechanical and temperature resistance enables the packing to ensure trouble free performance
- A multipurpose plant wide packing for the pulp and paper industry
- A thorough impregnation of PTFE provides low friction operations and a dense packing without any leak paths
- A non-staining and non-abrasive packing, significantly reduces wear rate than many other packing

*Available in rope and ring form*

<b>Service Media and Conditions</b>	Chemicals, strong acids, moderate alkali, pulp and paper applications, liquor, water, sewage, mines applications etc
<b>Temperature</b>	-80°C to 280°C
<b>Pressure</b>	200 bar (static), 60 bar (rotary), 45 bar (reciprocating)
<b>Shaft Speed</b>	15 m/sec (rotary)
<b>pH</b>	0 to 13
<b>Applications</b>	Pumps, agitators, mixers etc